


PiaZZle®

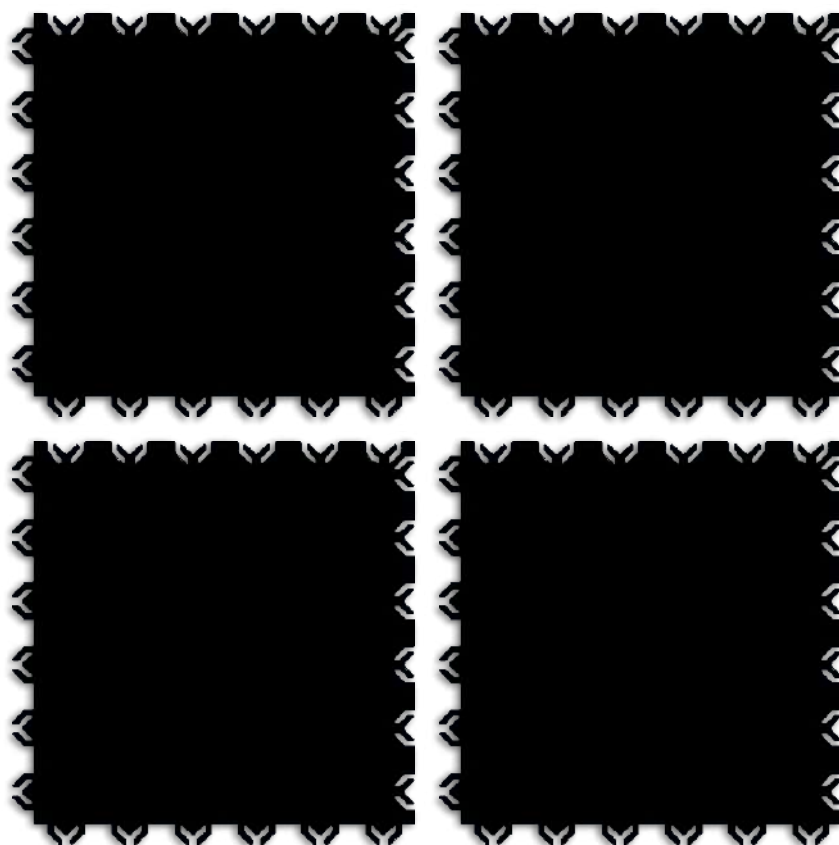

LAYING INDICATIONS

Dry laying indications

The substrates must be clean, uniformly dry, mechanically resistant, dust-free, without removable parts, cracks, waxes, oils or rust.

The substrates must be free of protrusions and/or dips, in which case it is necessary to proceed leveling the substrate to make it even.

PiaZZle products must be removed from the packaging at least 24 hours before laying. Let them laid freely on a flat surface to allow acclimatization and the reduction of tensions due to packaging. If laying dry floors, leave enough perimeter spaces not to obstruct the natural thermal expansion of the products.

Important

When laying PiaZZle, make sure that the pavement is not reached directly from the sun's rays, in order to avoid excessive thermal expansion, even in the case of rooms with large windows it is advisable to shield the direct passage of sunlight to avoid direct contact with the sun.

Do not expose the products to sunlight. In this case, use glue and/or fixing system in areas exposed to sunlight.

To facilitate natural thermal expansion of the products, it is recommended to leave an adequate distance between

the flooring and walls depending on the extension.

In the case of significant extensions, we recommend to leave of expansion joints.

LAYING INDICATIONS WITH GLUE

The substrates must be uniformly dry, mechanically resistant, free of dust, removable parts, cracks, paints, waxes, oils, rust and anything else that could not let the product adhere.

The substrates must be free of protrusions and/or dips, in which case it is necessary to level the substrate to make it even.

PiaZZle products must be removed from the packaging a few hours before laying. Let them lay freely to allow the acclimatization and the decrease of the tensions due to the packaging.

The glue must be carefully massaged from the centre outwards making particular attention to the edges, so as to allow total contact, while at the same time coming out of the sides any air bubbles.

PiaZZle products must be laid ensuring optimal coplanarity of the tiles, facilitated also by the high versatility of the product due to the perfect adherence to the underlying flooring without the need to remove or sanding.

If the PiaZZle products have flatness defects, it is necessary to weigh them down with bags of sand or other parts deformed until hardened.


Technical data:

Please see Mapei Adesilex G19 technical data sheet


Important notices:

Do not use on substrates subject to rising damp; on wet surfaces; on fresh asphalt (wait at least 30 days); on bituminous surfaces where there is the possibility of oil exudation.


1) Remove the tiles from the packaging, taking care not to damage the items with the use of sharp tools.

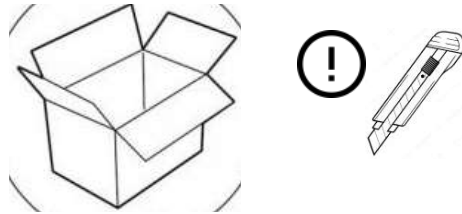


2) The products must be removed from the packaging at least 24 hours before laying. Let them lying freely on a flat surface to allow acclimatization and the reduction of tensions due to packaging.

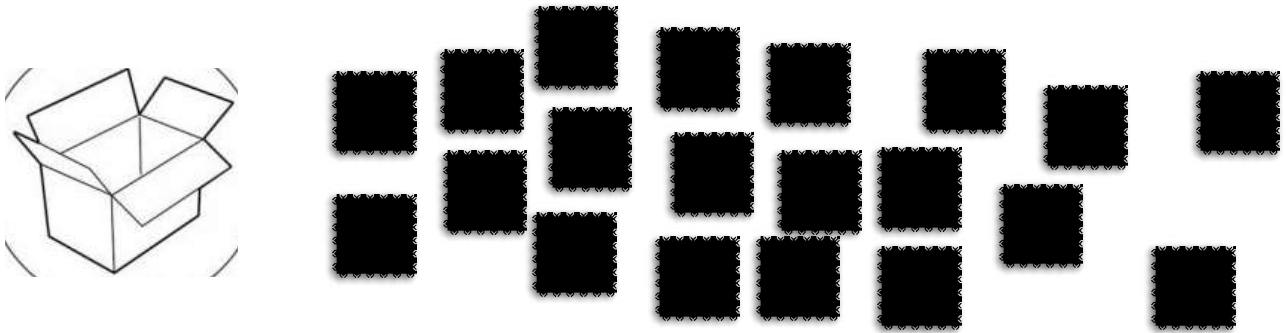

3) Clean the subfloor thoroughly, taking care to eliminate any depressions, fit the tiles with the help of a rubber hammer. Respect the laying direction of the flooring by **always pointing the arrow in the same direction.**

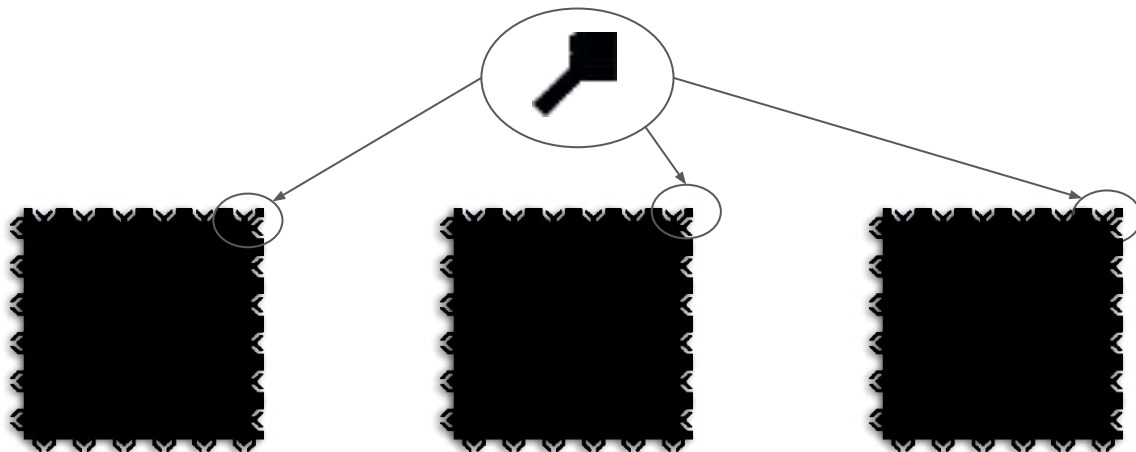

4) Use a normal cutter to finish the tiles along the walls, taking care to leave the sufficient space for thermal expansion.

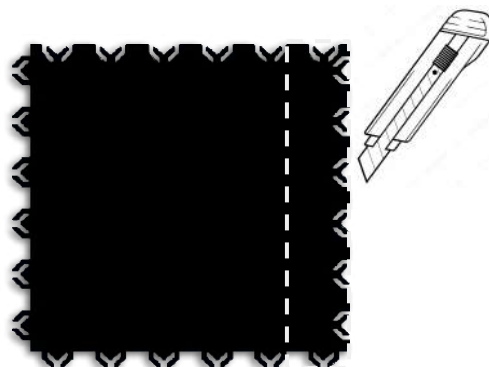

MAINTENANCE AFTER INSTALLATION

After laying, please let it rest for at least 72 hours. Carry out sweeping or vacuuming.

A simple cleaning with a single brush and detergent is enough to remove dust caused by any residual electrostatic charges.

Washing can be done with a single brush at 150/400 rpm with a soft antistatic brush, using a detergent properly diluted in water.

In the absence of a single brush, clean by hand with an antistatic synthetic fibre pad and a suitable detergent diluted in water.

Ordinary cleaning

Sweep with a wet broom or damp gauze or disposable cloth.

If you need to remove dirty stains, wash with a detergent properly diluted in water and a single-brush or washer dryer; if there are black marks caused by shoes heels or the protective film is deteriorated, it is recommended to use the single brush at 150/400 rpm spraying a suitable wax based product.

On dry and clean surface, use the single brush at 150/400 rpm with a polishing brush.

Useful tips

We remind you that some products/accessories should be avoided for PVC floors:

1. Ammonia products
2. Powerful solvent-based products
3. Brushes and / or aggressive discs for regular maintenance.

Products waterproofing:

To make the products waterproof, we recommend final treatment with self-polishing polyacrylic wax.

PLEASE NOTE: IN THE EVENT OF EXPOSURE TO UV RAYS, THE ARTICLES MUST BE GLUED WITH APPROPRIATE BI-COMPONENT POLYURETHANE ADHESIVE

Application of self-polishing polyacrylic wax

To reduce the incidence of dirt, and/or dusty residues, in addition to the installation of doormats, it is possible to treat the items with self-polishing polyacrylic wax with a glossy and/or matte finishing combined with a correct cleaning and maintenance program depending on the intensity and type of traffic.



JKJ S.r.l.
Via Cese prima, 80
82030 Puglianello (BN)
Italy



www.jkj.it